



Deck Mount Waterfall Bathroom Sink Faucets - Square, Bronze Chrome Finish

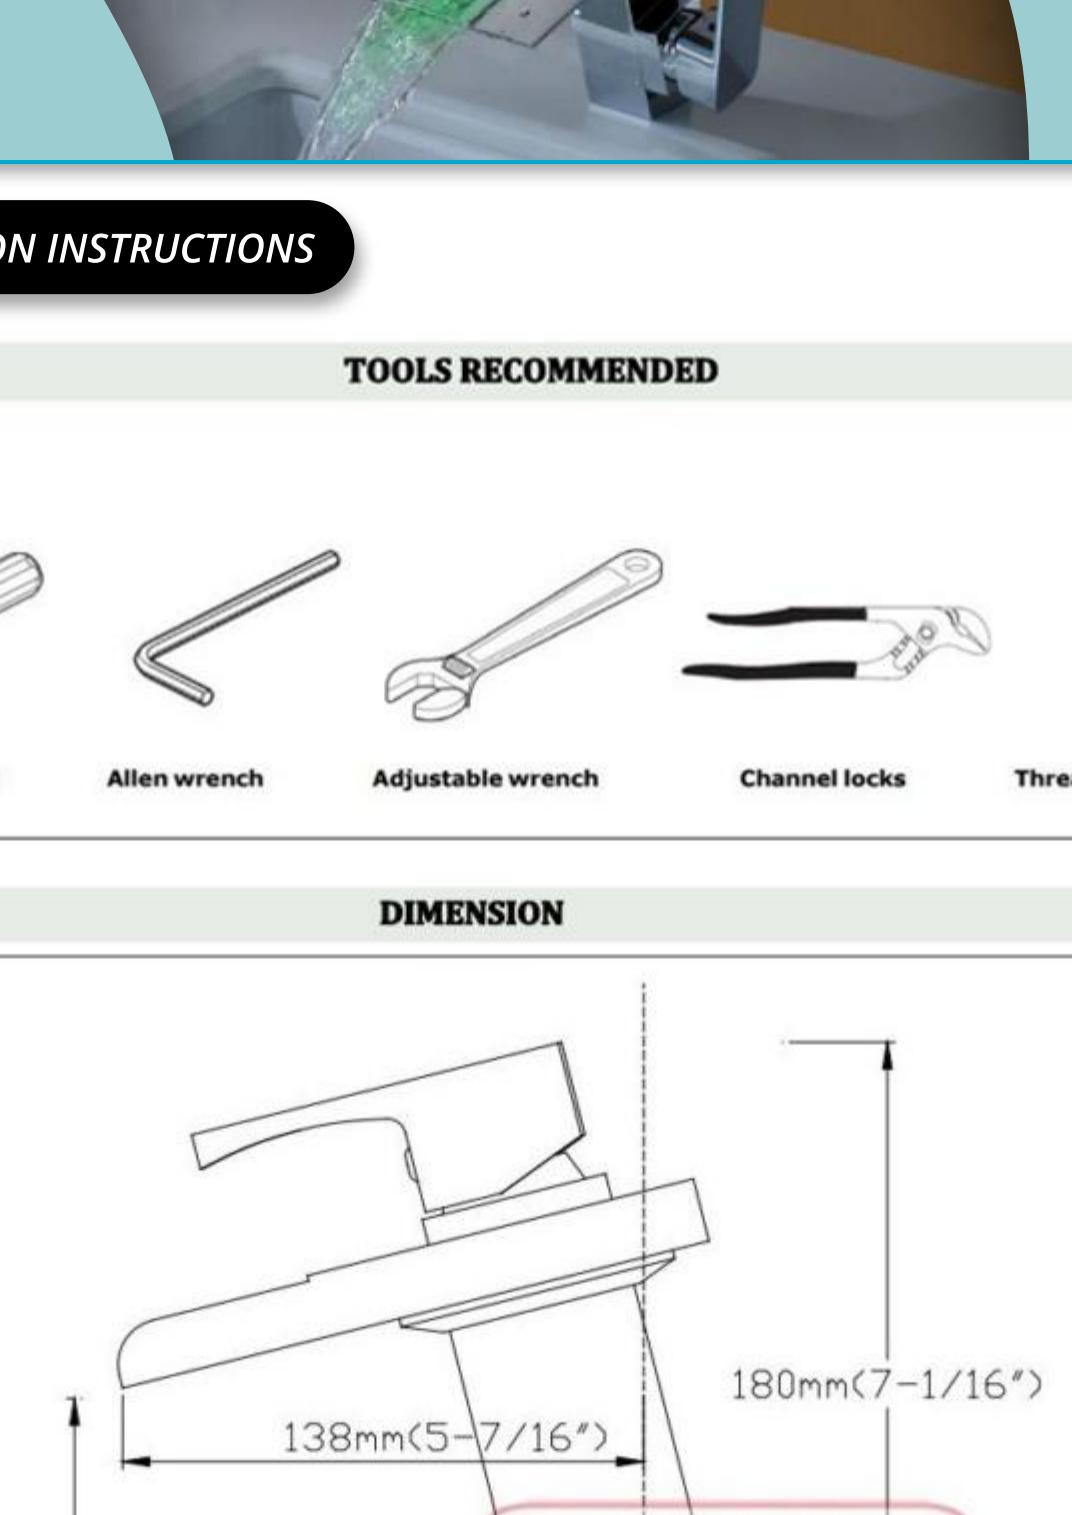


INSTALLATION INSTRUCTIONS


TOOLS RECOMMENDED

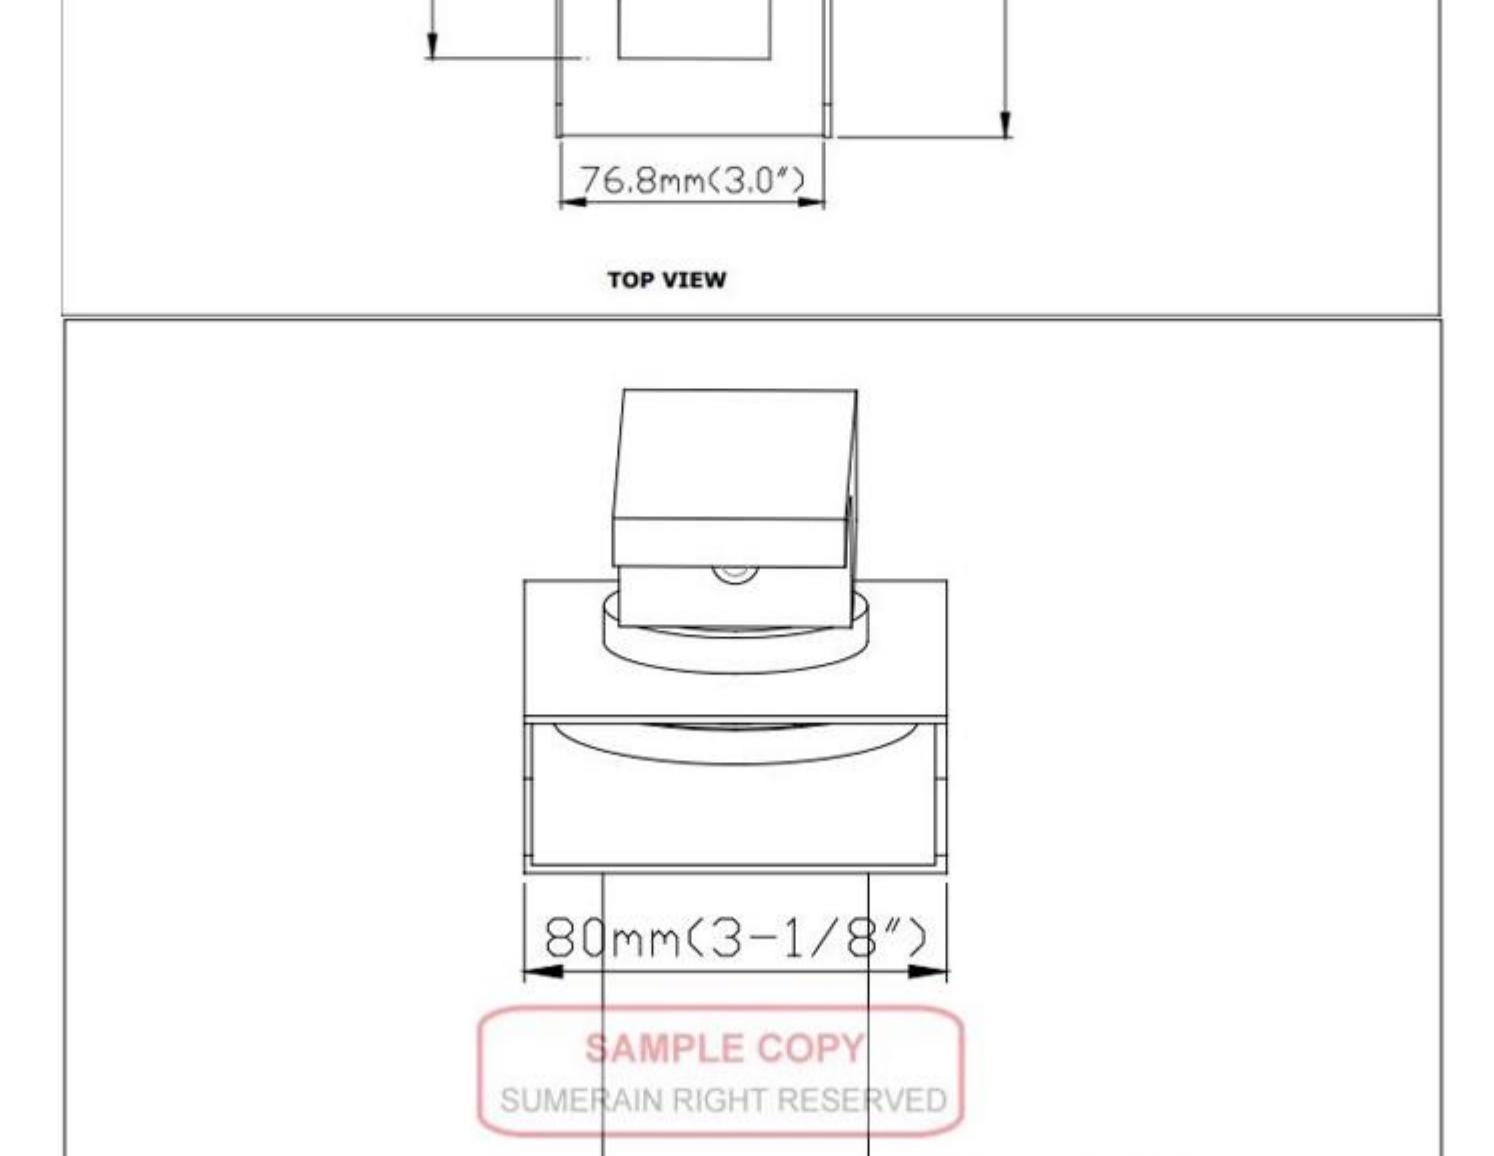


DIMENSION

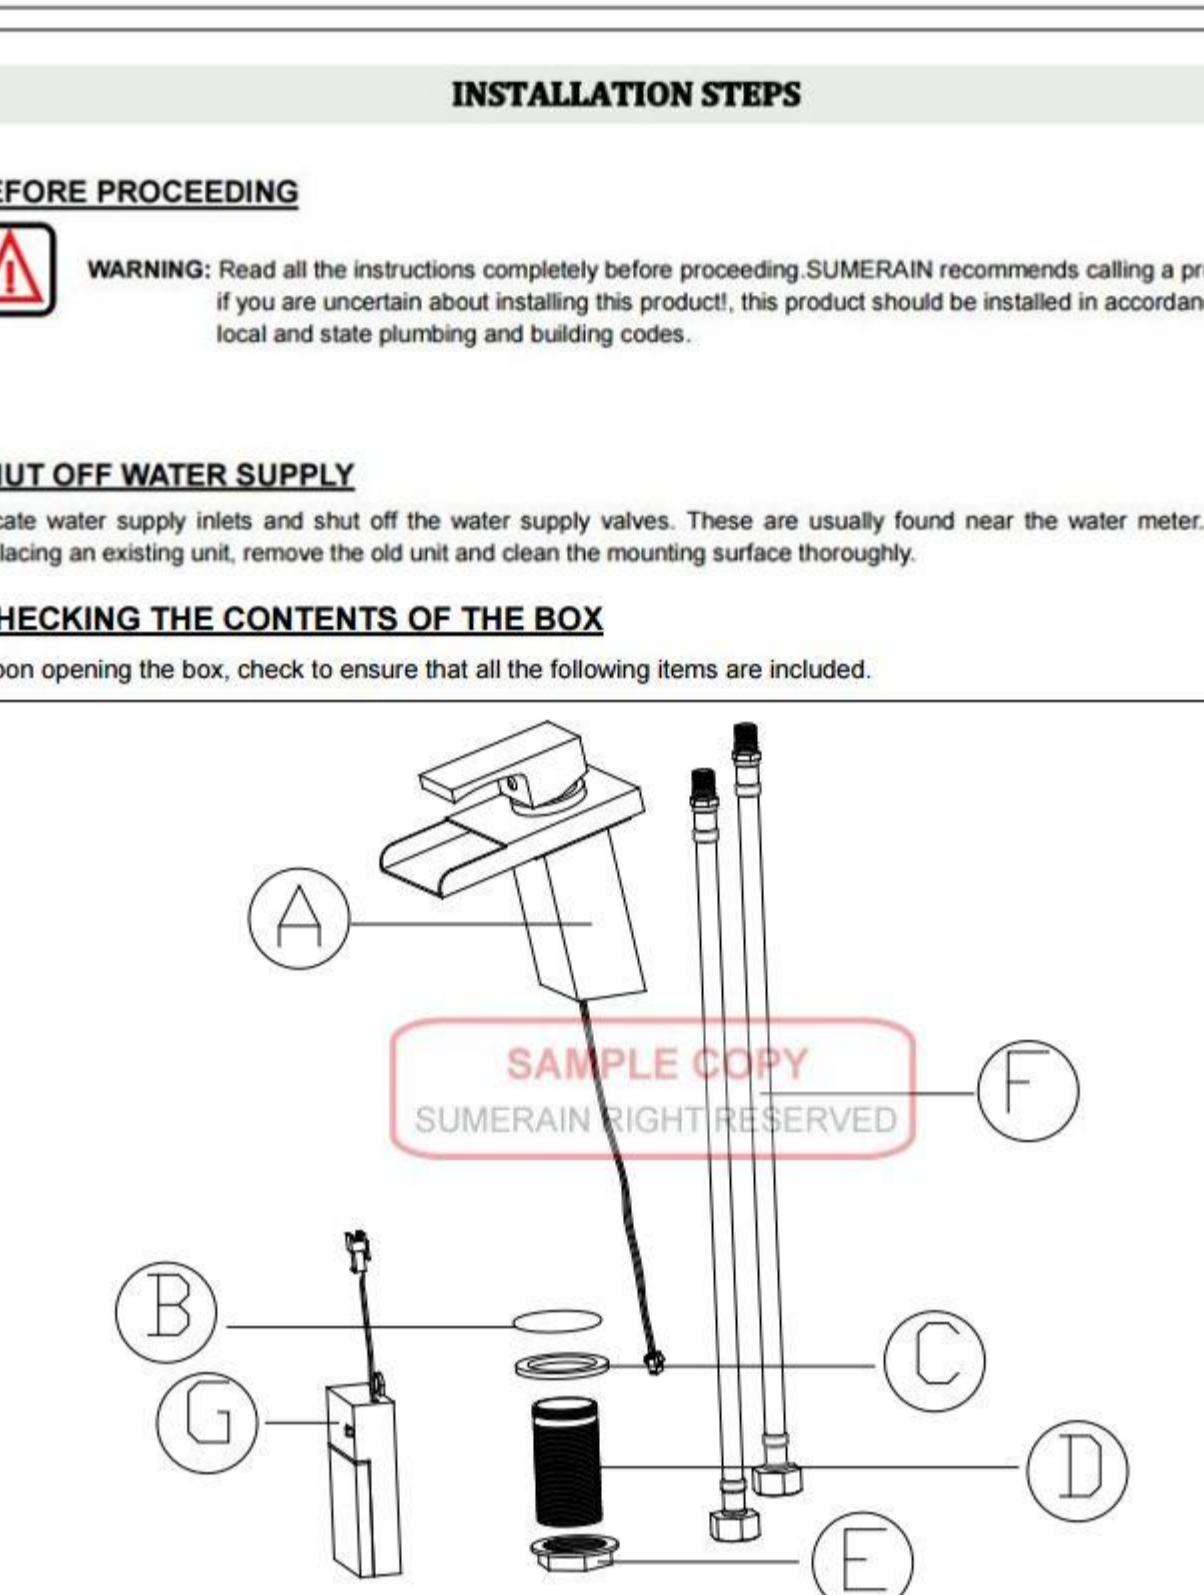

SIDE VIEW

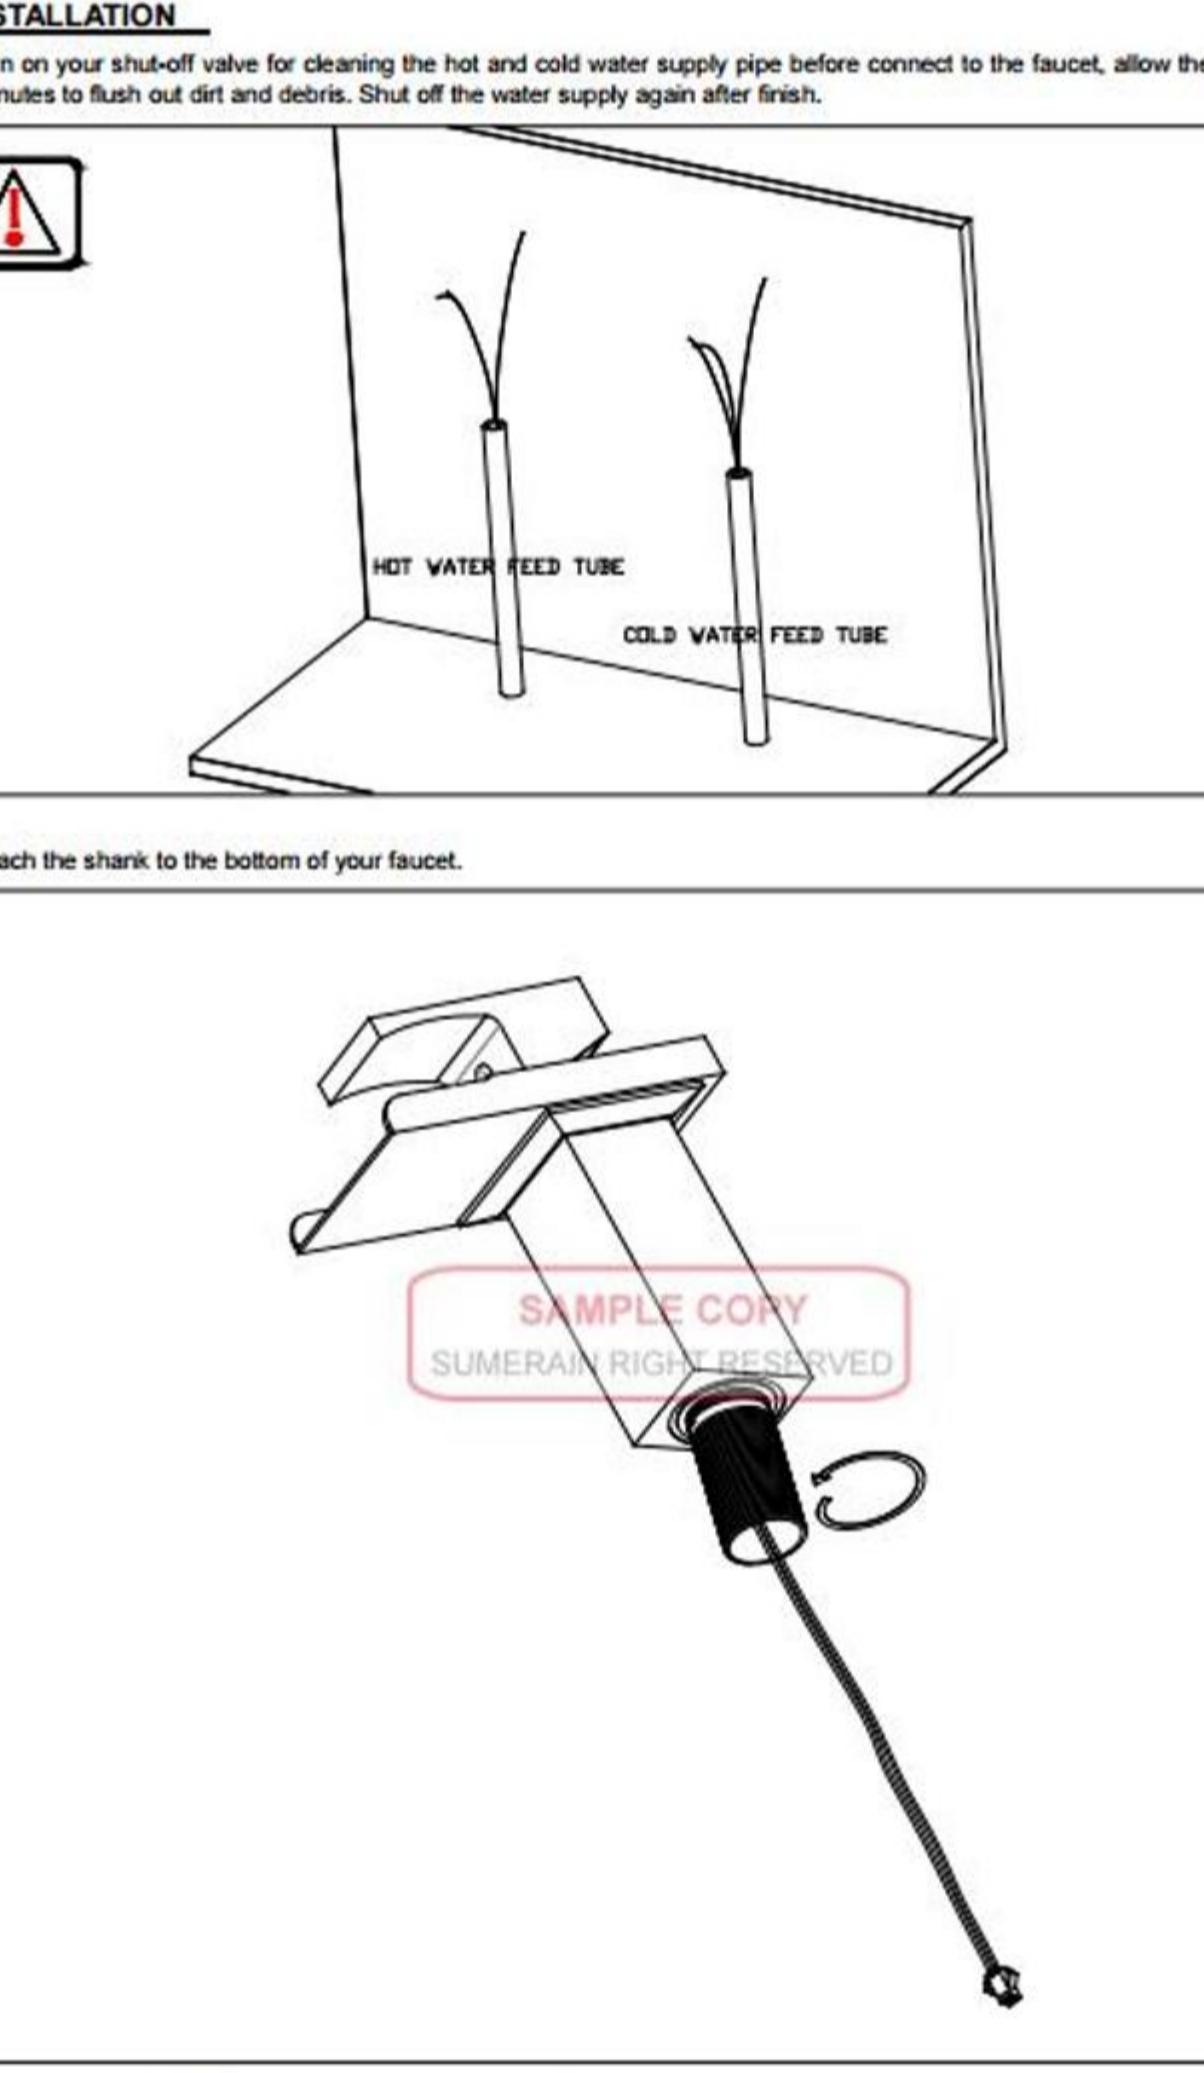

TOP VIEW

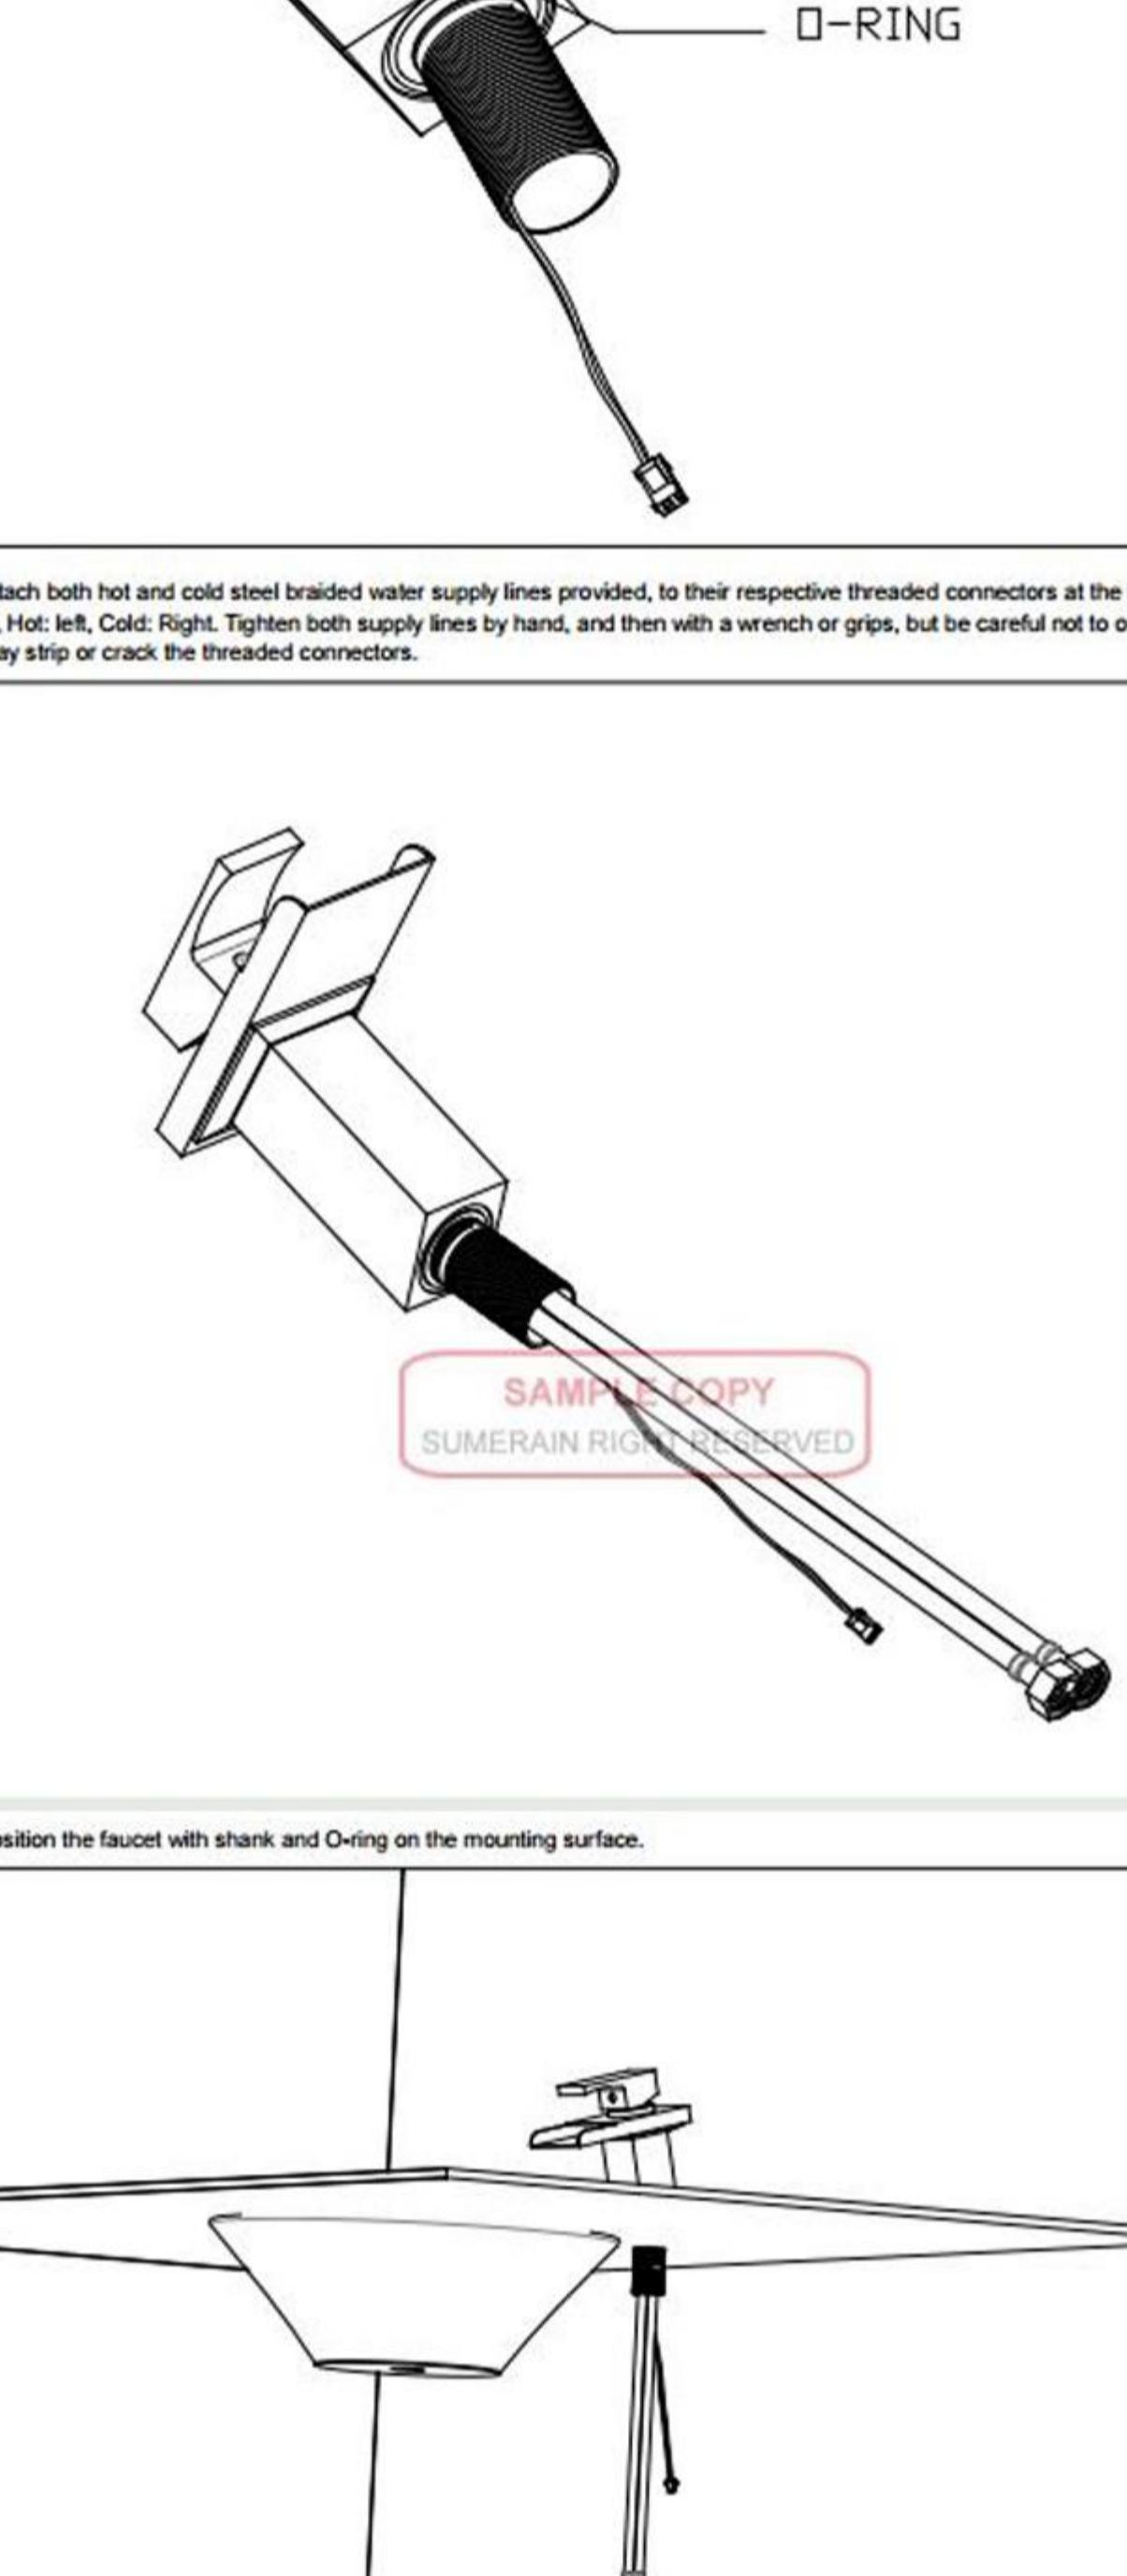

INSTALLATION STEPS

1. BEFORE PROCEEDING




WARNING: Read all the instructions completely before proceeding. SUMERAIN recommends calling a professional if you are uncertain about installing this product! This product should be installed in accordance with all local and state plumbing and building codes.

2. SHUT OFF WATER SUPPLY

Locate water supply inlets and shut off the water supply valves. These are usually found near the water meter. If you are replacing an existing unit, remove the old unit and clean the mounting surface thoroughly.


3. CHECKING THE CONTENTS OF THE BOX

Upon opening the box, check to ensure that all the following items are included.

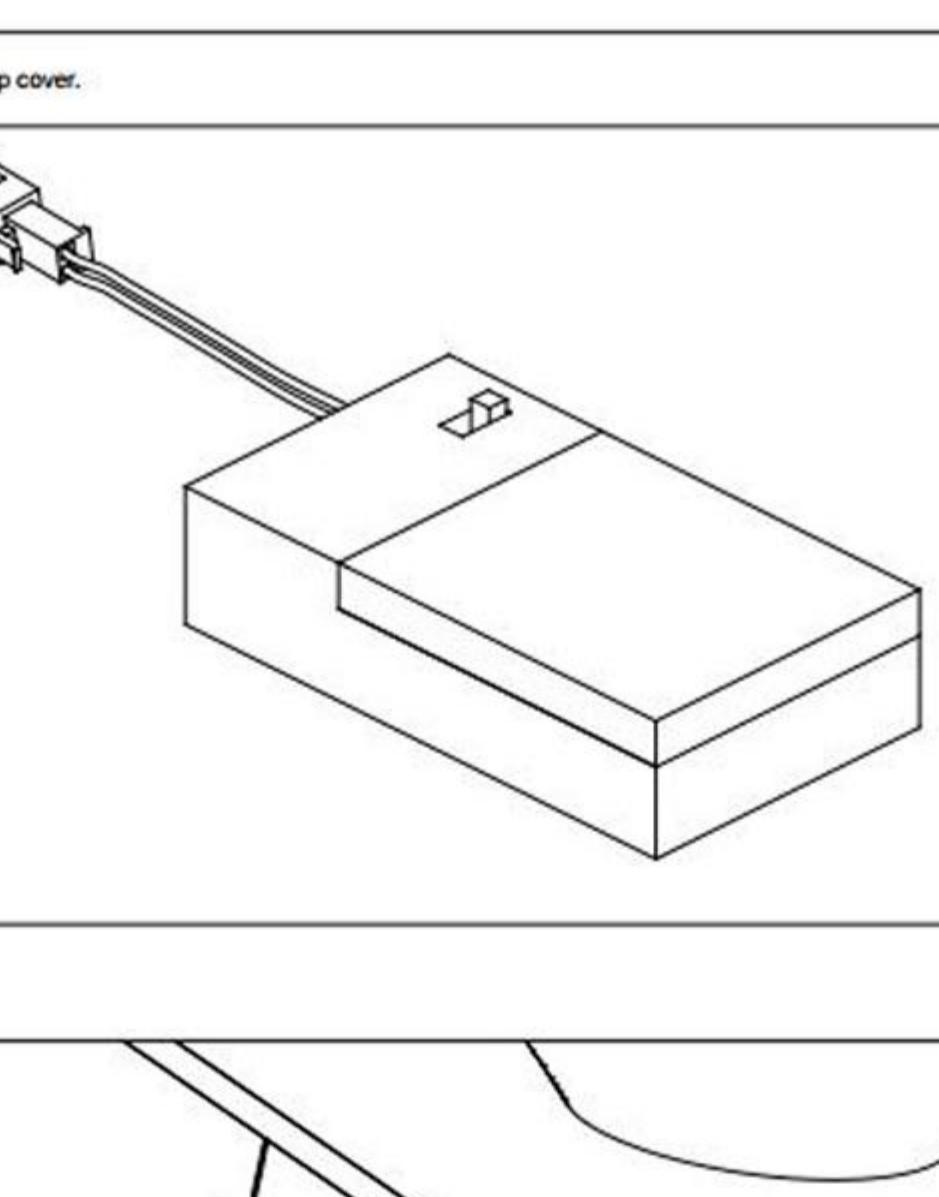


4. INSTALLATION HOLES INSPECTION

Verify that the hole sizes and positions on the desk is correct, the diameter of mounting hole should be 32mm (1-1/4") at least and maximum 40mm (1-9/16"), the max thickness of deck should be 45mm (1-3/4")

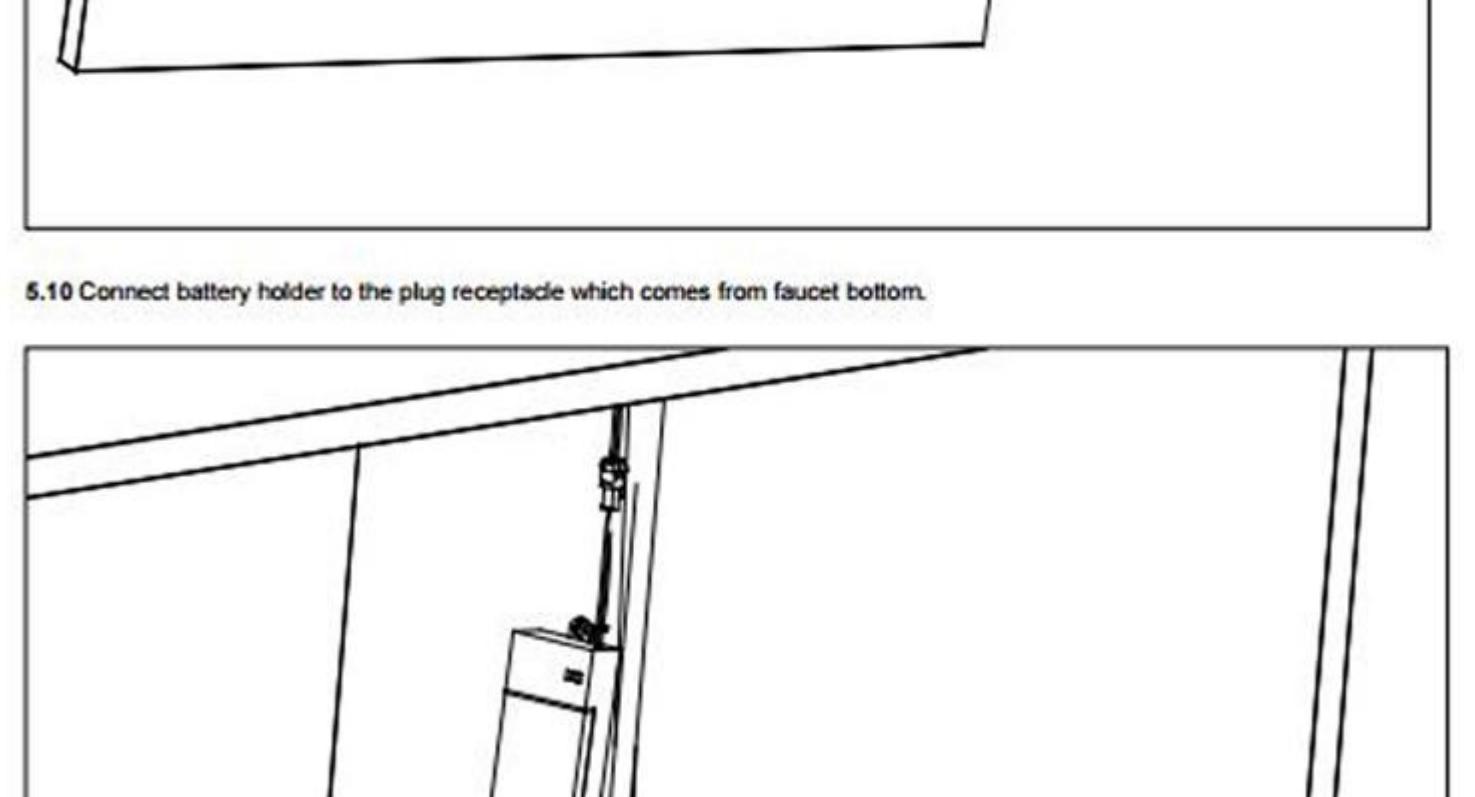


5. INSTALLATION

5.1 Turn on your shut-off valve for cleaning the hot and cold water supply pipe before connect to the faucet, allow the water flush 3-5 minutes to flush out dirt and debris. Shut off the water supply again after finish.

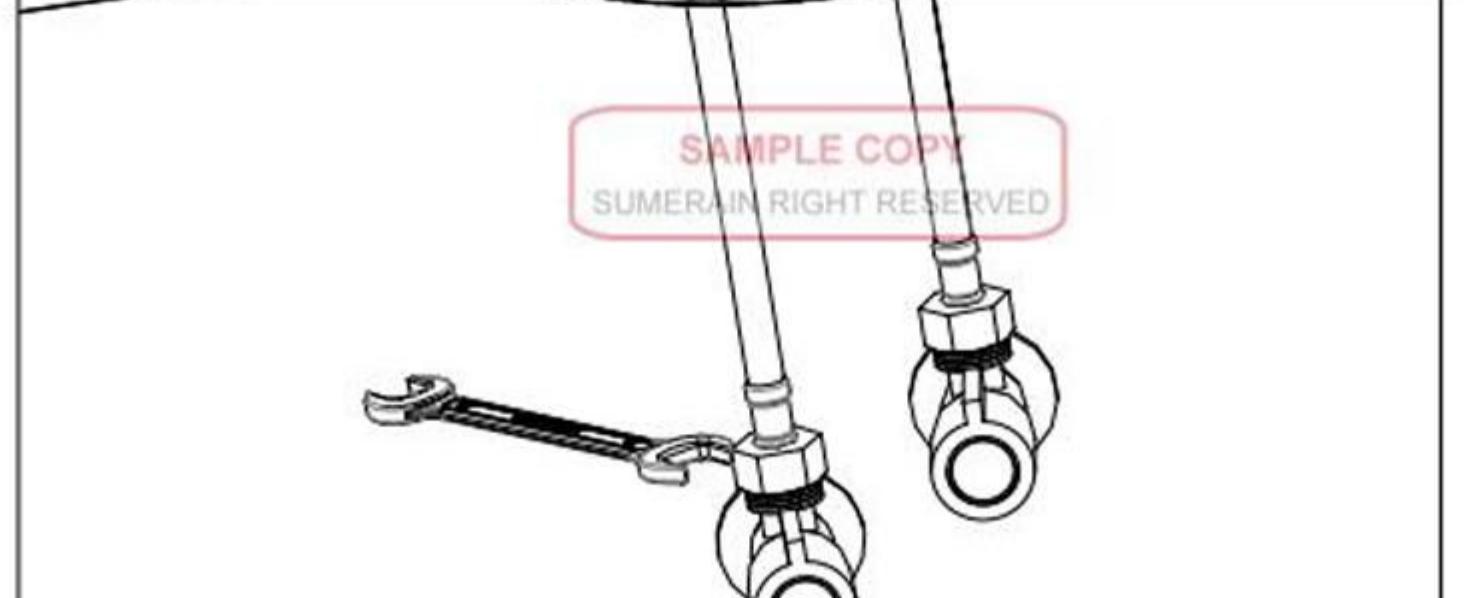

5.2 Attach the shank to the bottom of your faucet.

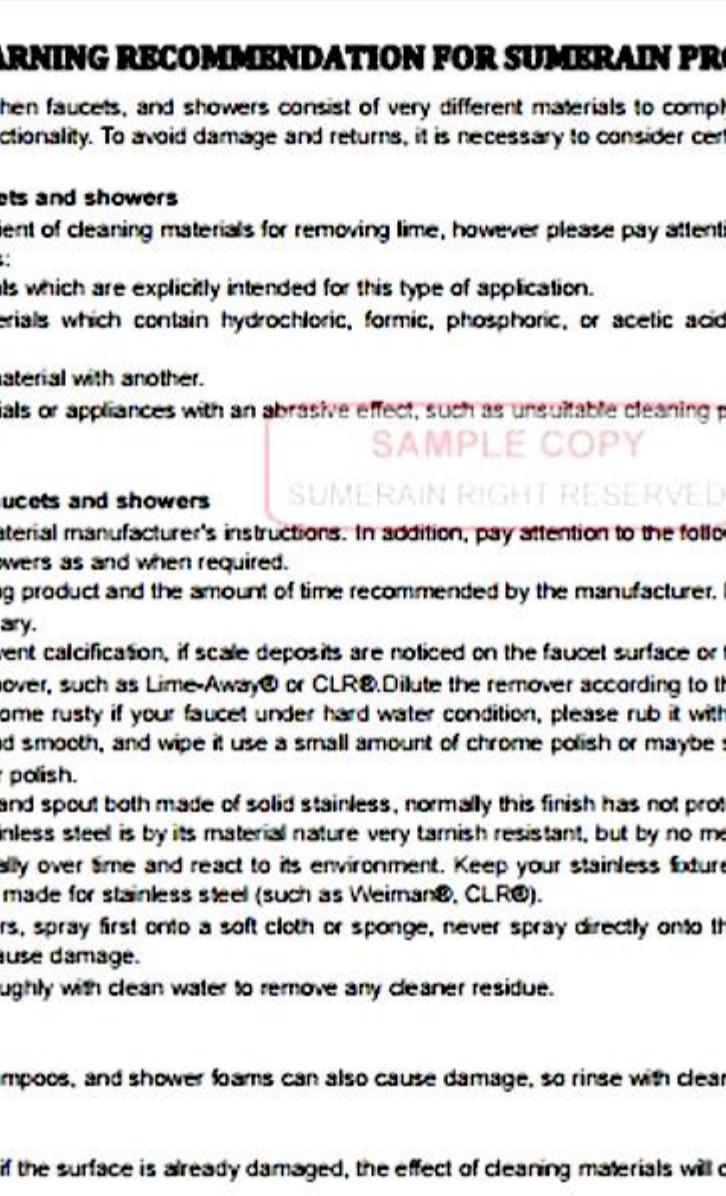

5.3 Place the O-ring on the mounting surface of faucet's bottom.



5.4 Attach both hot and cold steel braided water supply lines provided, to their respective threaded connectors at the bottom of the faucet. May be left: Cold: Right. Tighten both supply lines by hand, and then with a wrench or grips, but be careful not to over tighten or you may strip or crack the threaded connectors.

5.5 position the faucet with shank and O-ring on the mounting surface.

5.6 Attach the rubber washer, and then the lock nut provided to the shank from underneath the countertop and tightens with a wrench or grips until the faucet is secured.

5.7 Place 3 PCs AA battery into the battery holder (please don't make mistake on the Plus+Minus or else it will damage electronic components), then turn on the power switch (Notes: 1th.No Battery are including in the shipment; 2th. Battery holder's switch is turn on by default when delivered).

5.8 Fasten the battery top cover.

5.9 Connect battery holder to the plug receptacle which comes from faucet bottom.

5.10 Attach the hot and cold water hose from the faucet to each of the hot and cold supply valve, tighten the mounting nut by hand.

5.11 Attach your shut-off valve for cleaning the hot and cold water supply pipe before connect to the faucet, allow the water flush 3-5 minutes to flush out dirt and debris. Shut off the water supply again after finish.

5.12 Attach the hot and cold steel braided water supply lines provided, to their respective threaded connectors at the bottom of the faucet. May be left: Cold: Right. Tighten both supply lines by hand, and then with a wrench or grips, but be careful not to over tighten or you may strip or crack the threaded connectors.

5.13 position the faucet with shank and O-ring on the mounting surface.

5.14 Attach the rubber washer, and then the lock nut provided to the shank from underneath the countertop and tightens with a wrench or grips until the faucet is secured.

5.15 Place 3 PCs AA battery into the battery holder (please don't make mistake on the Plus+Minus or else it will damage electronic components), then turn on the power switch (Notes: 1th.No Battery are including in the shipment; 2th. Battery holder's switch is turn on by default when delivered).

5.16 Fasten the battery top cover.

5.17 Connect battery holder to the plug receptacle which comes from faucet bottom.

5.18 Attach the hot and cold water hose from the faucet to each of the hot and cold supply valve, tighten the mounting nut by hand.

5.19 Attach your shut-off valve for cleaning the hot and cold water supply pipe before connect to the faucet, allow the water flush 3-5 minutes to flush out dirt and debris. Shut off the water supply again after finish.

5.20 Attach the hot and cold steel braided water supply lines provided, to their respective threaded connectors at the bottom of the faucet. May be left: Cold: Right. Tighten both supply lines by hand, and then with a wrench or grips, but be careful not to over tighten or you may strip or crack the threaded connectors.

5.21 position the faucet with shank and O-ring on the mounting surface.

5.22 Attach the rubber washer, and then the lock nut provided to the shank from underneath the countertop and tightens with a wrench or grips until the faucet is secured.

5.23 Place 3 PCs AA battery into the battery holder (please don't make mistake on the Plus+Minus or else it will damage electronic components), then turn on the power switch (Notes: 1th.No Battery are including in the shipment; 2th. Battery holder's switch is turn on by default when delivered).

5.24 Fasten the battery top cover.

5.25 Connect battery holder to the plug receptacle which comes from faucet bottom.

5.26 Attach the hot and cold water hose from the faucet to each of the hot and cold supply valve, tighten the mounting nut by hand.

5.27 Attach your shut-off valve for cleaning the hot and cold water supply pipe before connect to the faucet, allow the water flush 3-5 minutes to flush out dirt and debris. Shut off the water supply again after finish.

5.28 Attach the hot and cold steel braided water supply lines provided, to their respective threaded connectors at the bottom of the faucet. May be left: Cold: Right. Tighten both supply lines by hand, and then with a wrench or grips, but be careful not to over tighten or you may strip or crack the threaded connectors.

5.29 position the faucet with shank and O-ring on the mounting surface.

5.30 Attach the rubber washer, and then the lock nut provided to the shank from underneath the countertop and tightens with a wrench or grips until the faucet is secured.

5.31 Place 3 PCs AA battery into the battery holder (please don't make mistake on the Plus+Minus or else it will damage electronic components), then turn on the power switch (Notes: 1th.No Battery are including in the shipment; 2th. Battery holder's switch is turn on by default when delivered).

5.32 Fasten the battery top cover.

5.33 Connect battery holder to the plug receptacle which comes from faucet bottom.

5.34 Attach the hot and cold water hose from the faucet to each of the hot and cold supply valve, tighten the mounting nut by hand.

5.35 Attach your shut-off valve for cleaning the hot and cold water supply pipe before connect to the faucet, allow the water flush 3-5 minutes to flush out dirt and debris. Shut off the water supply again after finish.

5.36 Attach the hot and cold steel braided water supply lines provided, to their respective threaded connectors at the bottom of the faucet. May be left: Cold: Right. Tighten both supply lines by hand, and then with a wrench or grips, but be careful not to over tighten or you may strip or crack the threaded connectors.

5.37 position the faucet with shank and O-ring on the mounting surface.

5.38 Attach the rubber washer, and then the lock nut provided to the shank from underneath the countertop and tightens with a wrench or grips until the faucet is secured.

5.39 Place 3 PCs AA battery into the battery holder (please don't make mistake on the Plus+Minus or else it will damage electronic components), then turn on the power switch (Notes: 1th.No Battery are including in the shipment; 2th. Battery holder's switch is turn on by default when delivered).

5.40 Fasten the battery top cover.

5.41 Connect battery holder to the plug receptacle which comes from faucet bottom.

5.42 Attach the hot and cold water hose from the faucet to each of the hot and cold supply valve, tighten the mounting nut by hand.

