



# Solid Brass Antique Design Claw Foot Wall Mount Bathtub Faucet

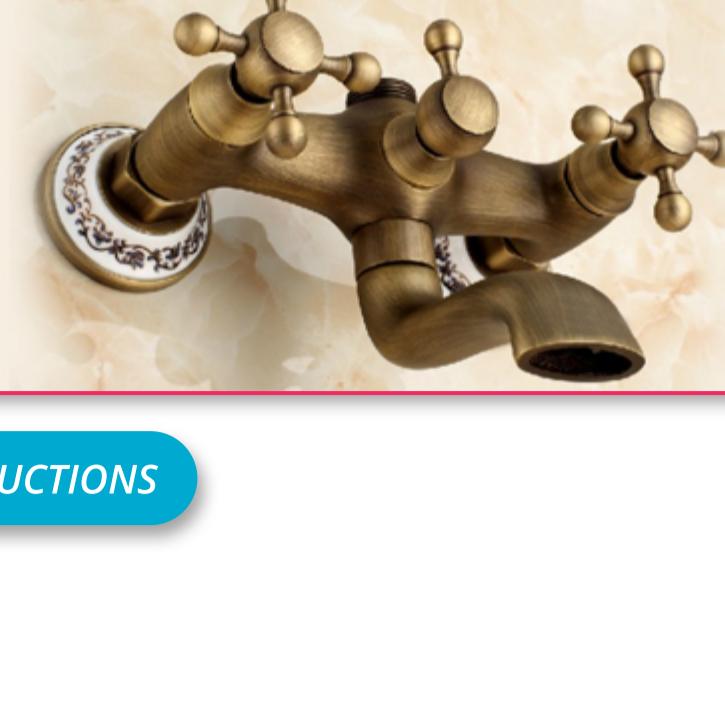

## INSTALLATION INSTRUCTIONS

- Installation Type: Wall Mount
- Design: Traditional
- Faucet Center: 7"
- Handle Type: Cross
- Features: Hand Shower Included
- Length: 9-1/2"
- Height: 11"
- Height To Spout: 4-1/4"
- Spout Width: 2"
- Handle Material: Brass
- Hot and Cold Indicators: Yes
- Drain Included: No
- Base Plate Length: 2"
- Base Plate Width: 2"
- Ceramic Disc Cartridges: Yes
- Hand Shower Hose Length: 60"
- Hand Shower Style: Telephone
- 2" wall coupler shown in photography.
- Spout reach with 2" / 4" / 6" couplers: 7-1/2" / 9-1/2" / 11-1/2".

### Wall-Mount Faucet and Hand Shower, Cross Handles

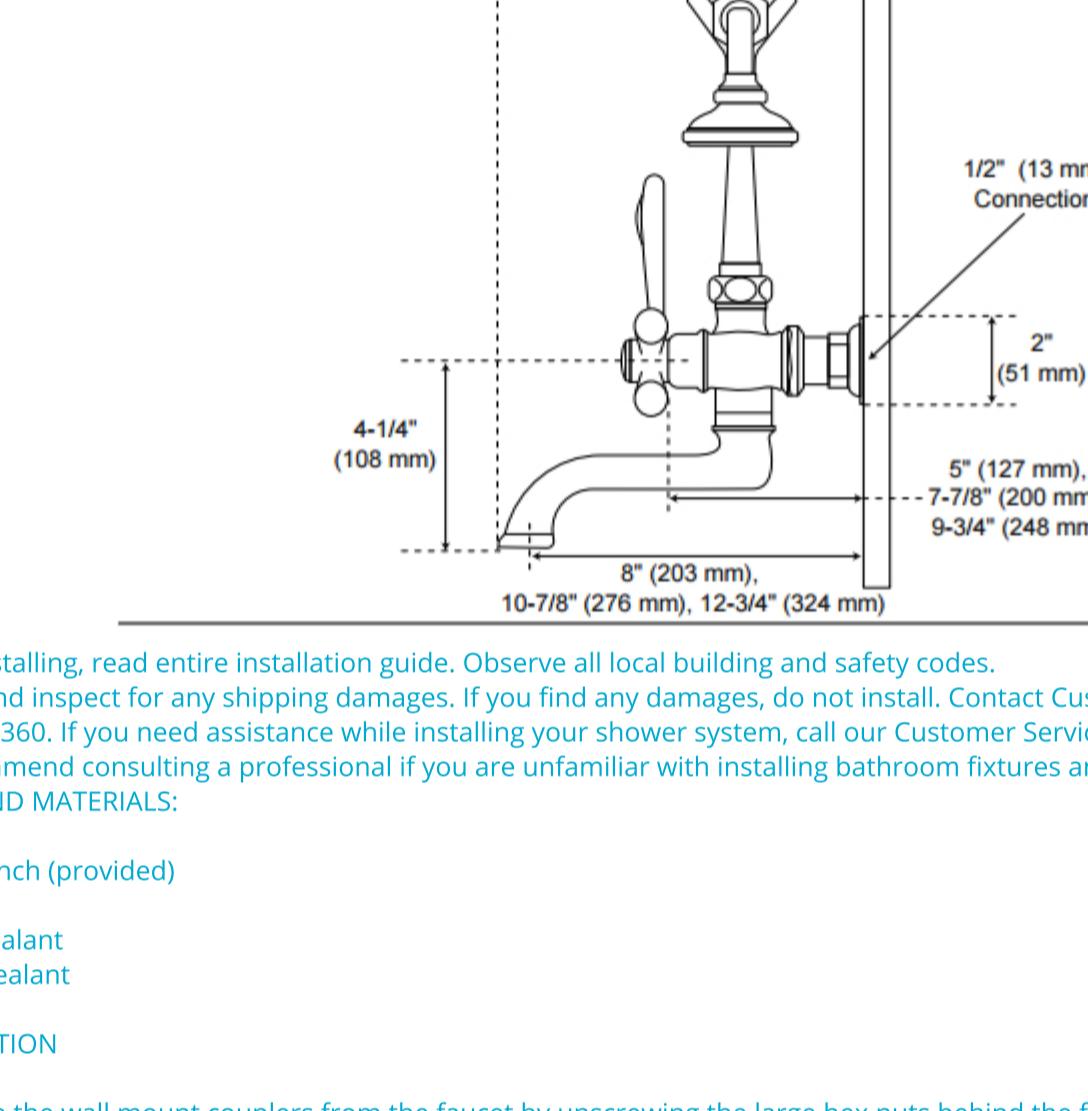

- Before installing, read entire installation guide. Observe all local building and safety codes.
- Unpack and inspect for any shipping damages. If you find any damages, do not install. Contact Customer Service at 800-422-1360. If you need assistance while installing your shower system, call our Customer Service number.
- We recommend consulting a professional if you are unfamiliar with installing bathroom fixtures and plumbing.

#### TOOLS AND MATERIALS:

- Allen Wrench (provided)

- Level

- Thread Sealant

- Silicone Sealant

#### INSTALLATION

1. Remove the wall mount couplers from the faucet by unscrewing the large hex nuts behind the faucet handles.

2. Place thread sealant or plumber's tape on the  $\frac{1}{2}$ " pipe nipples protruding from the wall.

3. Run a bead of silicone sealant along the base of the wall couplers.


4. Thread the wall couplers onto the  $\frac{1}{2}$ " pipe nipples.

5. Make sure the bases of the couplers are firmly against the wall and that the couplers are aligned properly. Wipe away any excess sealant with a damp cloth.

6. Place the faucet body on the wall couplers. Hand tighten the coupling nuts to secure.

7. Install the hand shower and nozzle and any rubber sealing gaskets included.

8. When your faucet installation is complete, turn on the water supply. Check to make sure that all connections are tight (no water should be leaking) and that the hot and cold supplies are working correctly. Turn the water on and allow the water to flow through the spout for approximately 60 seconds. Allen Wrench (provided) Level Thread Sealant Silicone Sealant

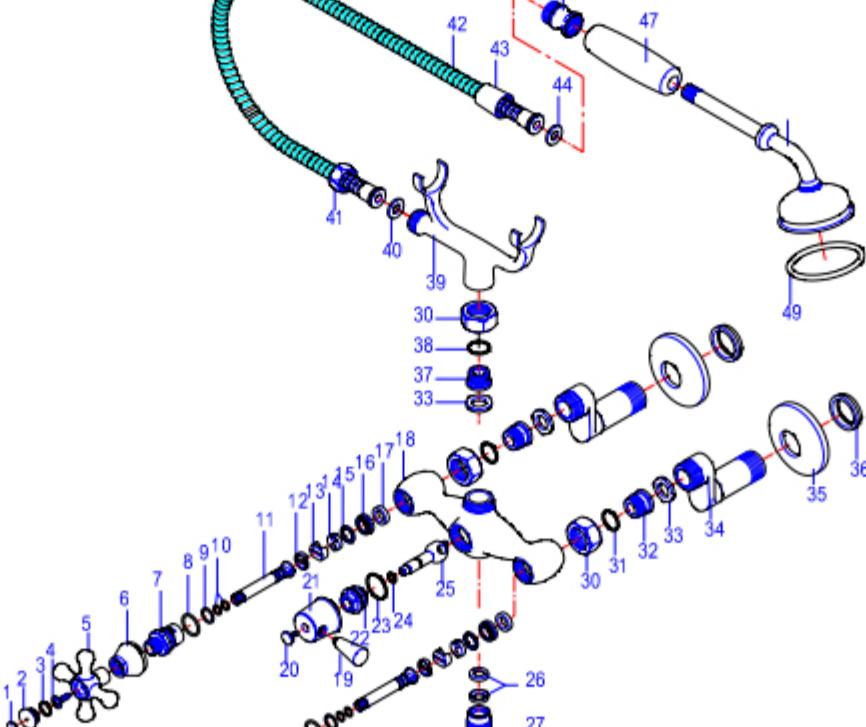

This General diagram and installation instructions are not intended for any specific model, but is presented as a general guideline for installations!