




INSTALLATION INSTRUCTIONS



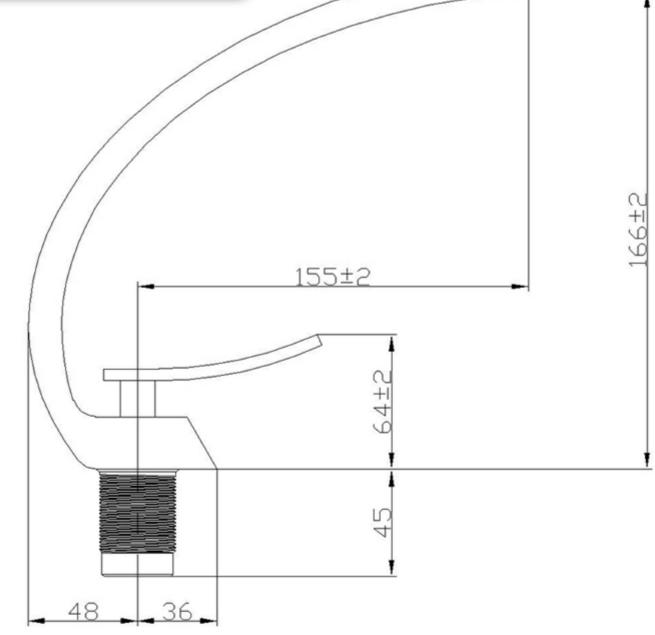


Distance of mounted central hole and wall that is greater than 5.5cm!




SUITABLE FOR VARIOUS BASIN COLLOCATION








5. Secure the faucet by reattaching the brass lock nut that was removed in step 3. Hand tighten and adjust the faucet until it is properly aligned. Once aligned, finish firmly tightening the lock nut.



6. Apply plumber's tape or thread sealant to the threading on each braided water line. Attach the water lines to your main water supply. Ensure that you are connecting the hot and cold lines accordingly.




DRAIN INSTALLATION

1. Dissasemble the drain assembly and lay the parts aside, in the same order they were removed. See the illustration below as a reference if needed.

> ш π


Pop-Up Drain Flange Flat Rubber Gasket Tapered Rubber Gasket Plastic Friction Washer Lock Nut Tailpiece 4. Insert the drain flange and tailpiece through the top of your sink's drain hole. SINK BASIN SINK BASIN COUNTERTOP COUNTERTOP

5. From under your counter, slide the tapered rubber gasket followed by the plastic friction washer onto the tailpiece until they meet your sink or countertop. Be sure that the tapered side of the rubber washer is facing up.

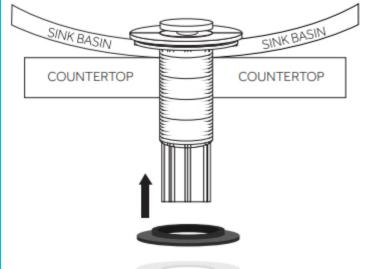




7. Once installation is complete, turn the main water supply back on from underneath your sink. Check for any leaks underneath.



8. Proceed to sink drain installation. Once complete, turn the faucet on and check for leaks. Check to ensure that both hot and cold water are running properly. Allow the water to flow for approximately 60 seconds to remove any dust or sediment within the water lines.



2. Apply plumber's tape to the threading on the tailpiece, then reattach the tail piece to the pop-up drain flange.



3. Slide the flat rubber gasket up the tailpiece until it meets the lip of the pop-up drain flange.



6. Thread the lock nut onto the drain flange. Hand tighten until secure, then finish tightening with a basin wrench once the drain is properly aligned.

Important: Be careful not to overtighten, which could crack a porcelain sink or stone countertop.

SINK BASIN SINK BASIN COUNTERTOP COUNTERTOP

This General diagram and installation instructions are not intended for any specific model, but is presented as a general guideline for Installations!